



UNGLAZED PORCELAIN COLLECTION

www.rrpil.com

GLOBAL COLLECTION



Registered Office: 7th Floor, Windsor, C.S.T. Road, Kalina, Santacruz (E), Mumbai - 400 098, Maharashtra, India.

Liaison Office: 242, 8-A, National Highway, Dhruva, Morbi - 363 621, Gujarat, India.

Contact: +91 22 4086 7600 / 700

E-mail: info@rrpil.com

Website: www.rrpil.com

MASTER CATALOGUE_VAMIL_RRPIL_2023





LEADERSHIP IS AN **ACTION**,
NOT A POSITION.

ABOUT US

RMC Readymix Porselano (India) Limited (RRPIL) is one of the fastest growing building materials global supply partners headquartered in (India) that specialises in the production of Tiles and Bath ware. It is a part of (India's) leading integrated building material conglomerate with a presence of more than six decades.

The parent company is well-known for its extensive and innovative solutions in Cement, Ready-mix Concrete, Tiles, Sanitaryware & faucets, Adhesives etc. With an annual turnover of >70 million USD, the company has a significant market share in the building material segment. The business focuses on customer delight and aims to add more value by offering high-quality goods and services, as well as by developing innovative methods to enhance manufacturing competency and introducing cutting-edge technology.

OUR CERTIFICATIONS

- CERTIFICATION OF CONFORMITY.
- ISO 14001:2015
- ISO 9001:2015





“
VAMIL
beautiful
 as
Nature
 ”



Icons

TYOLOGY

G/P GLAZED PORCELAIN TILES Bla	U/P UNGLAZED PORCELAIN TILES Bla	Gr/P GRES PORCELAIN Bib	C CERAMIC BIIa	C CERAMIC BIII
--	--	-----------------------------------	--------------------------	--------------------------

EDGE

RECTIFIED	STRAIGHT
------------------	-----------------

SURFACE STRUCTURE

S SMOOTH	LS LIGHT STRUCTURE	HS HEAVY STRUCTURE
-----------------	---------------------------	---------------------------

FINISH

N NATURAL	L LAPPATO	FL FULL LAPPATO	P POLISHED	H HONED
------------------	------------------	------------------------	-------------------	----------------

SURFACE LOOK

C CARVING	RUSTIC	M MATT	S SATIN
P POLISHED	HG HIGH GLOSSY		

COLOUR VARIATIONS

V1 EVEN	V2 LIGHT	V3 MEDIUM	V4 STRONG
----------------	-----------------	------------------	------------------

INDICATIONS FOR USE

WALL TILES	FLOOR TILES
-------------------	--------------------

SUGGESTED APPLICATIONS

DOMESTIC PURPOSE	LIGHT COMMERCIAL TRAFFIC AREA	OUTDOOR	HEAVY COMMERCIAL TRAFFIC AREA
-------------------------	--------------------------------------	----------------	--------------------------------------



UNGLAZED PORCELAIN



UNGLAZED PORCELAIN

MODERN &
CLASSIC
Surfaces

TILE SIZE

PG NO.

120X180 CM

05

80X240 CM

09

60X120 CM


17

60X60 CM

21



UNGLAZED PORCELAIN
120 X 180 CM

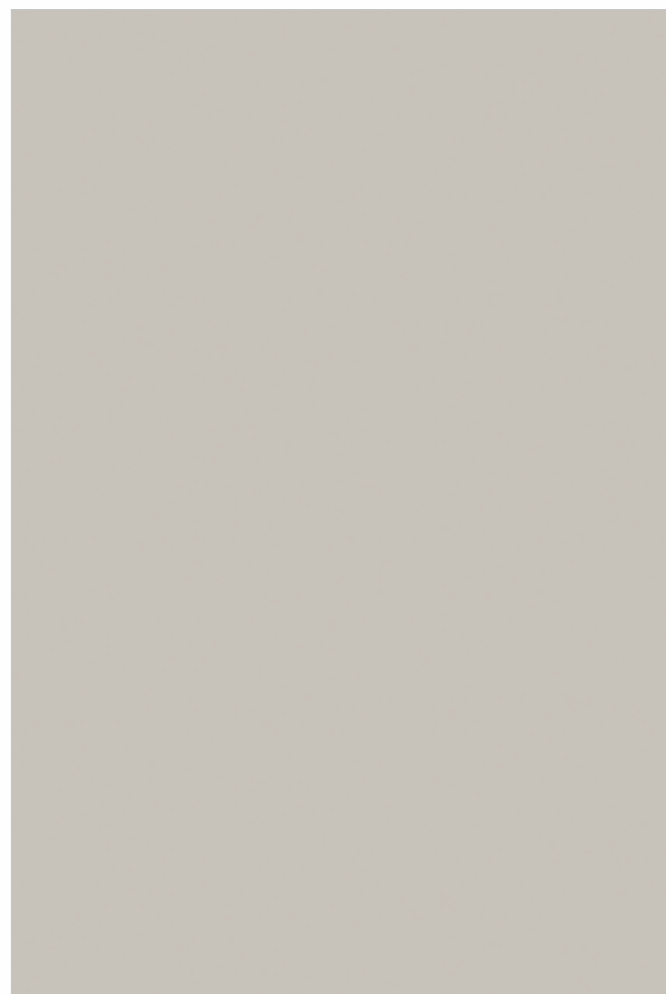


VA PARIS GREY




VA PARIS WALNUT




UNGLAZED PORCELAIN
120 X 180 CM



VA PARIS FOSSIL





VA PARIS STEEL

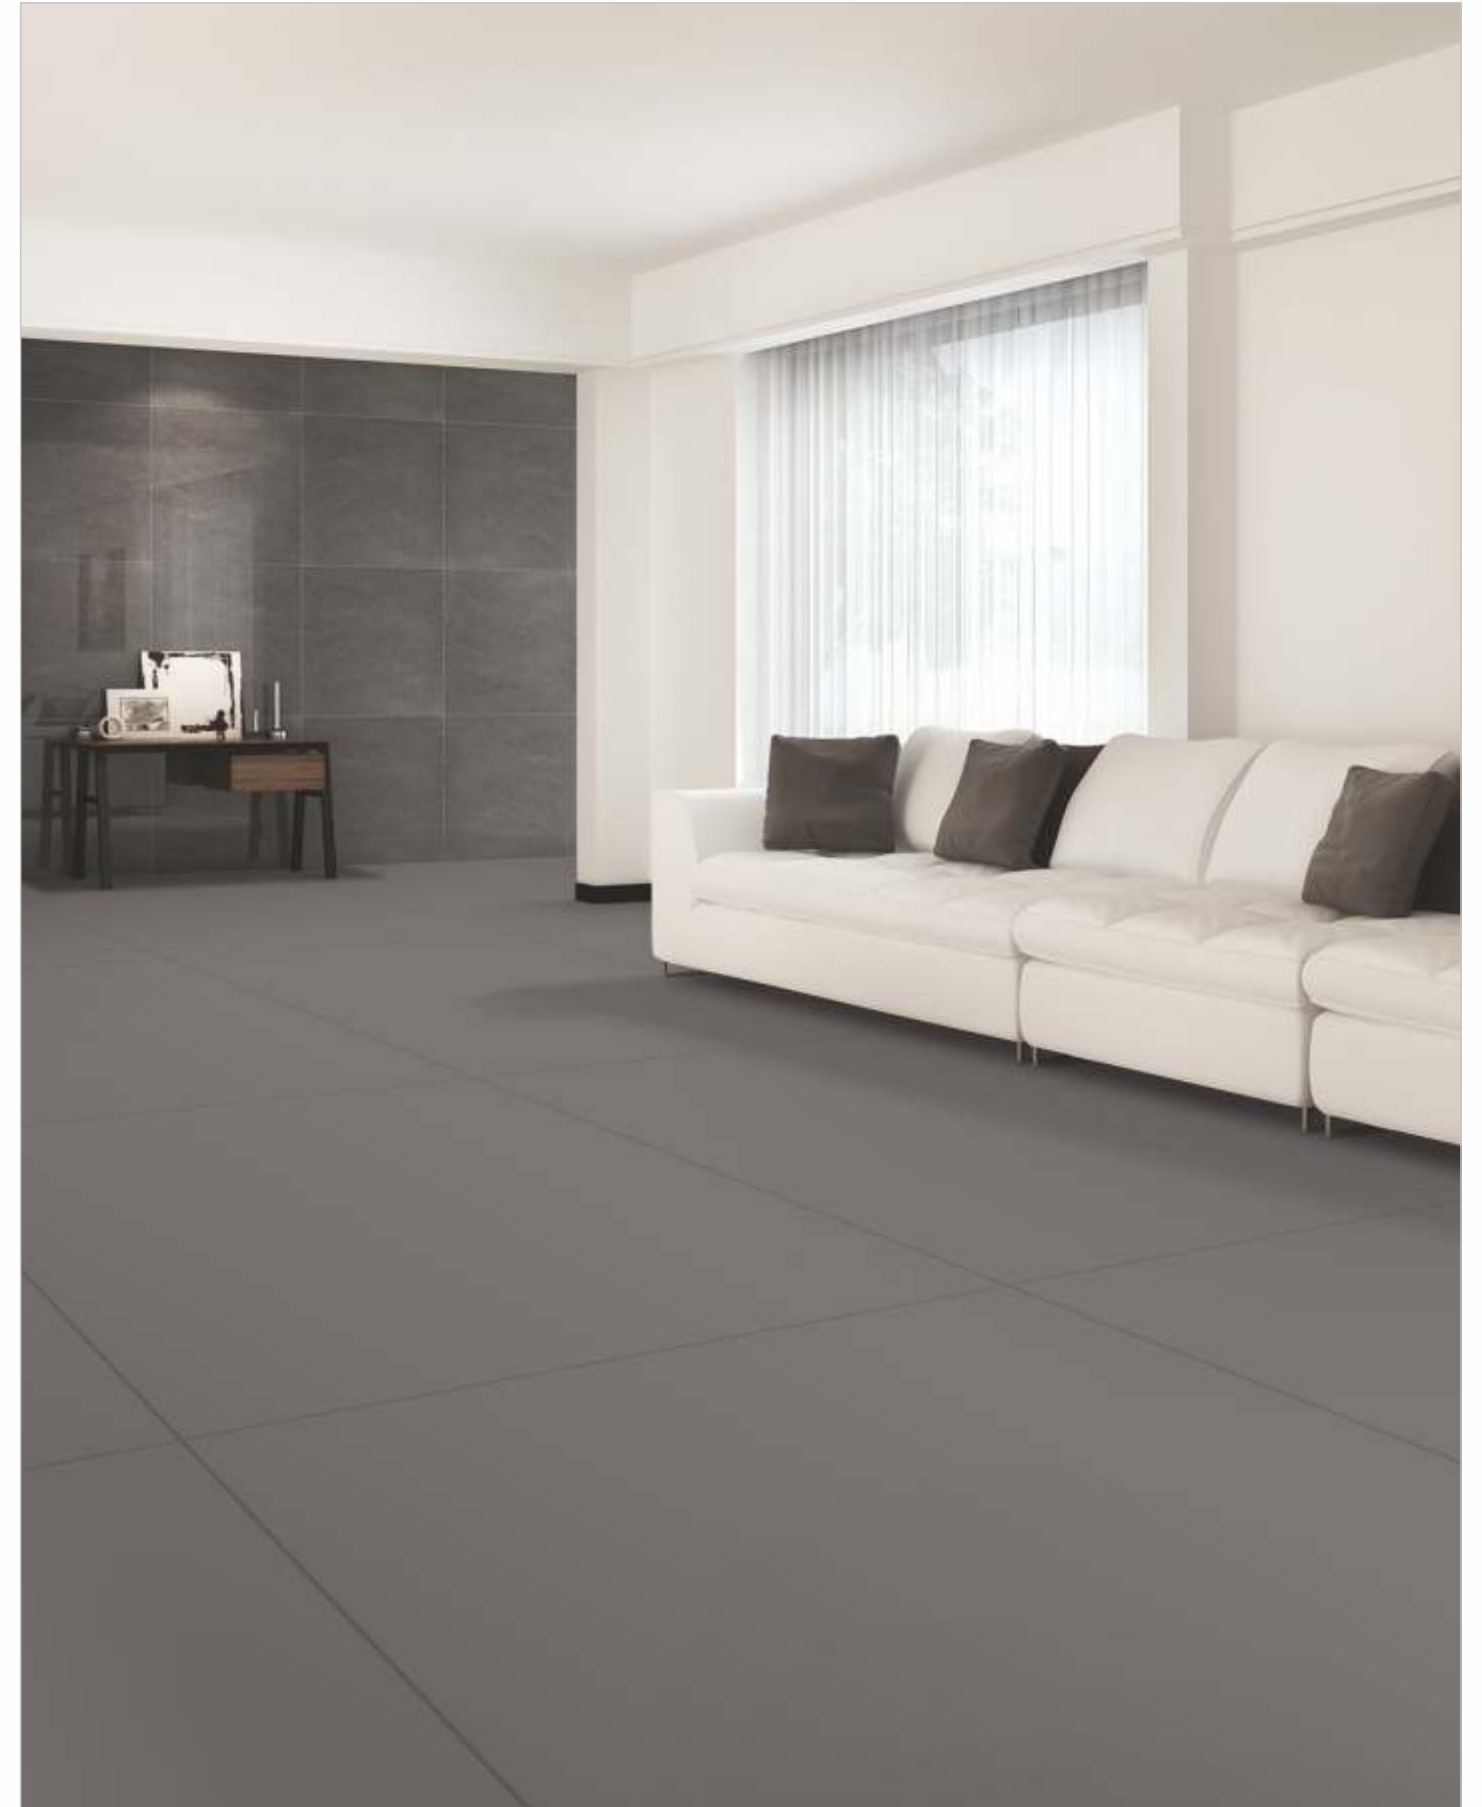

UNGLAZED PORCELAIN
80 X 240 CM

Also Available
80x300 CM

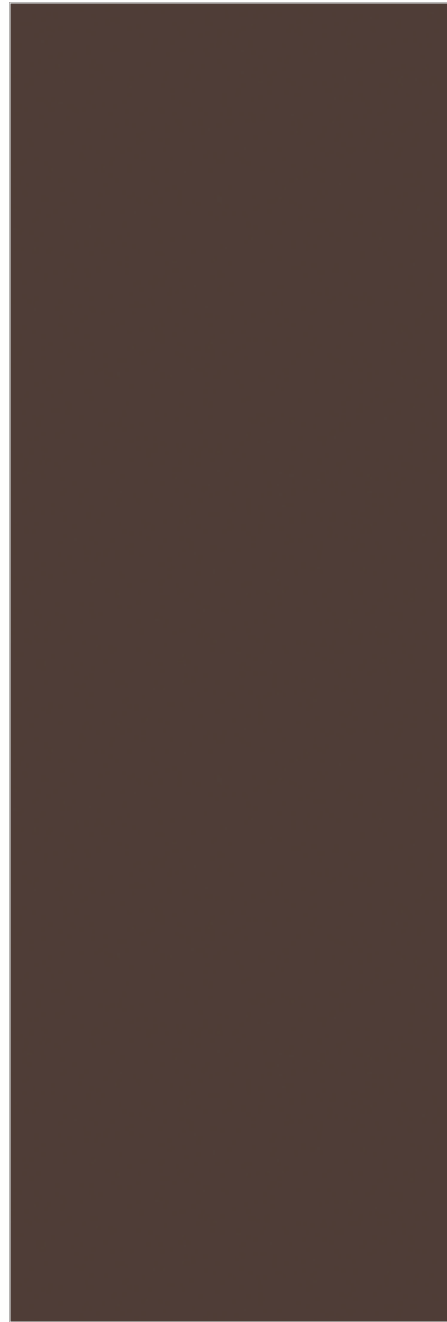


VA ABSOLUTE CHOCO  



VA ABSOLUTE GREY  




VA ABSOLUTE KOTA  

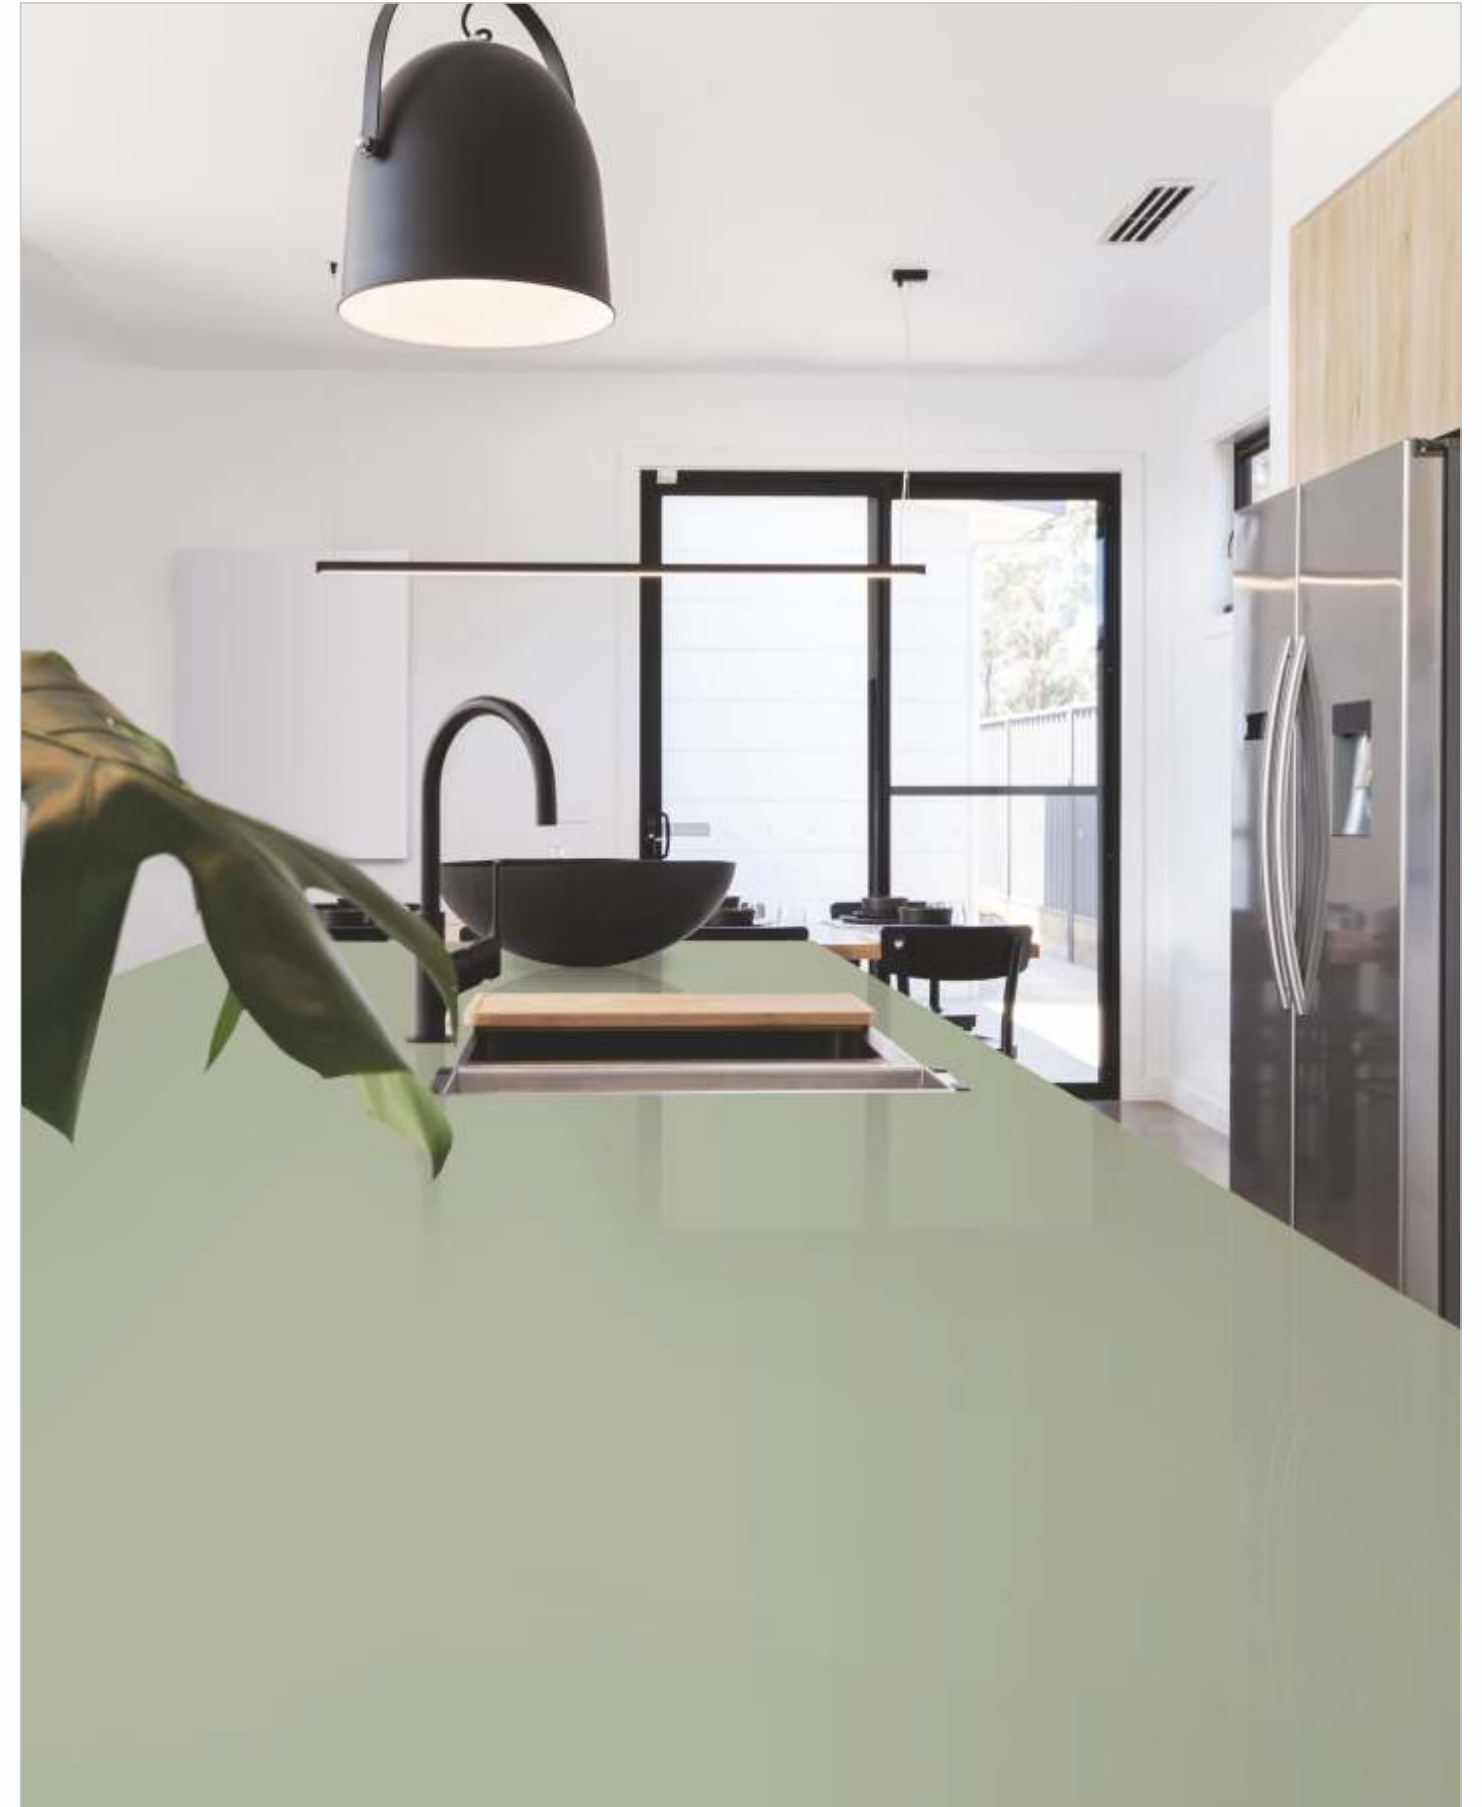


UNGLAZED PORCELAIN
80 X 240 CM


Also Available
80x300 CM



VA ANTAICO STEEL  

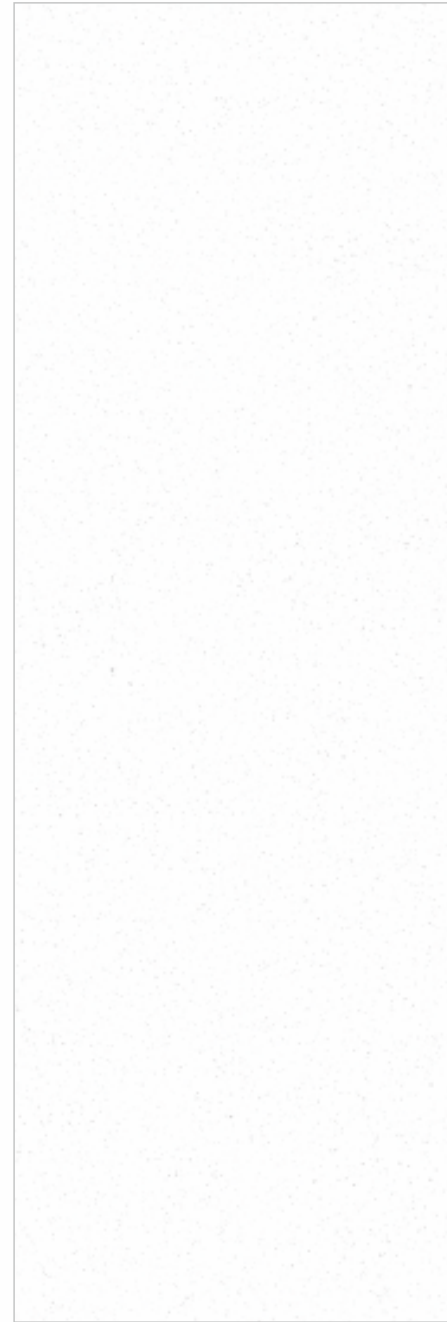

VA ANTAICO WHITE  





VA ABSOLUTE BLACK  



UNGLAZED PORCELAIN
80 X 240 CM

Also Available
80x300 CM

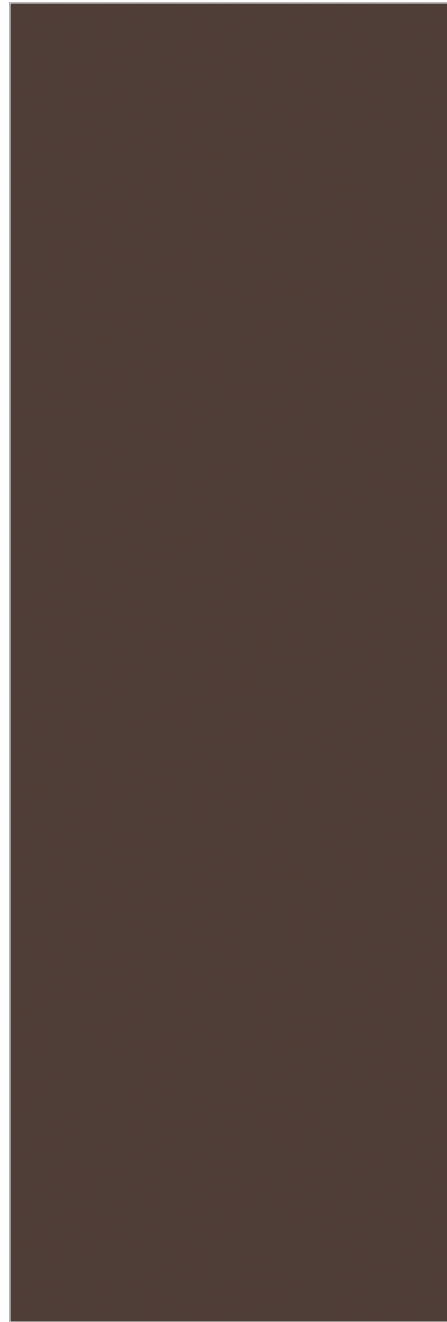

VA ABSOLUTE CHOCO  



VA ABSOLUTE GREY  



VA ABSOLUTE KOTA  



UNGLAZED PORCELAIN
80 X 240 CM

Also Available
80x300 CM



VA ABSOLUTE STEEL  





VA ANTAICO WHITE  



VA ABSOLUTE BLACK  



UNGLAZED PORCELAIN
60 X 120 CM

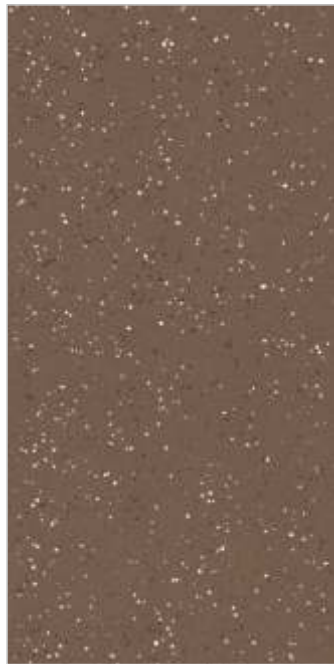

VA MATTLAB BROWN




VA MATTLAB IVORY



VA MATTLAB GREY



VA GRIPSOM DK GREY




VA GRIPSOM LT GREY



VA GRIPSOM DOVE



UNGLAZED PORCELAIN
60 X 120 CM




VA GRIPSOM BEIGE



VA GRIPSOM VERDE



VA MARMO NERO

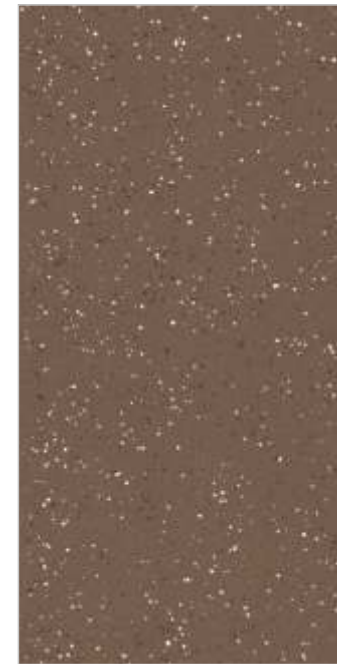


VA GLOSSLAB BROWN



VA GLOSSSLAB IVORY




VA GLOSSSLAB NERO

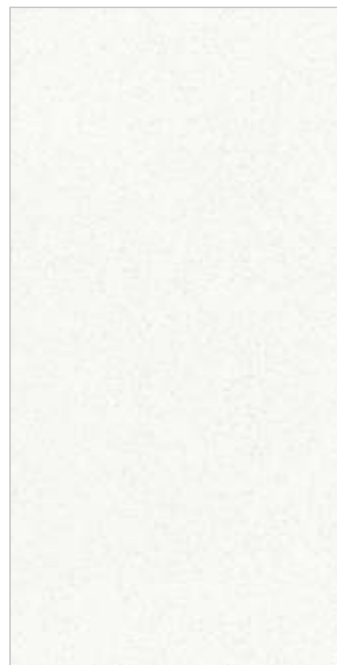

VA MARMO SILVER



VA LEPOLA BLACK




VA LEPOLA WHITE



VA GLOSSSLAB GREY



UNGLAZED PORCELAIN
60 X 60 CM



VA TERASTONE CREMA



VA TERASTONE BEIGE



VA TERASTONE OLIVE



VA TERASTONE PEARL



VA TERASTONE NERO




VA TERASTONE VERDE



VA TERASTONE CHOCO




VA ROMAN BLACK



VA ROMAN GREY



VA TECH STONE BLACK



VA KRESTONE CREMA



VA KRESTONE BEIGE



UNGLAZED PORCELAIN
60 X 60 CM



VA KRESTONE OLIVE




VA KRESTONE PERAL




VA KRESTONE NERO



VA FEATHER PEANUT
SPERENZA IVORY



VA FEATHER PEARL
SPERENZA CORAL



VA FILO MOCHA
SPERENZA GREY



VA KRESTONE VERDE



VA KRESTONE CHOCO



VA ROYAL STATUARIO
AMAZON BLACK



VA FILO SILVER
PRIME WHITE




VA ELEGANZA BLACK



VA ELEGANZA CHOCO




VA SHELL GREY
AMAZON ASH



VA PRINCE STATUARIO
AMAZON BEIGE



VA EMPERADOR CHOCO
AMAZON WHITE



VA ARMILO SILVER
OMANO PEARL



VA EXOTICA WOOD
SILVER OMANO GOLD



VA ERIS DÉCOR
SPERENZA WHITE PLUS



TECHNICAL SPECIFICATIONS



TECHNICAL SPECIFICATIONS - GLAZED VITRIFIED TILES / GROUP B1a

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP B1a	VAMIL VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-2	±0.6%	±0.2%
Deviation In Thickness	ISO-10545-2	±5%	±3%
Straightness of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	<0.05%	<0.04%
Mohs Hardness	EN-101	Min.5	Min.5
Flexural Strength	ISO-10545-4	>35 N/mm ²	>40N/mm ²
Skid Resistance (Friction Coefficient)	ISO-10545-17	>0.4	>0.4
Breaking Strength	ISO-10545-11	>1113 N	>1800N
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	Abrasion class shall be specified by the manufacturer	PEI III, IV & V
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

PACKING DETAILS

Dimension (CM)	BOX					
	Pcs. per box	Sq. mtr	Sq. feet	Weight	Boxes / Pellet	Container
120x240 CM	1	2.88	31.00	60.00	37	6
120x180 CM	2	4.32	46.50	87.00	27x9, 15x3	12
120x120 CM	2	2.88	31.00	60.00	22	20
20x120 CM	5	1.20	12.92	27.10	26	38
80x160 CM	2	2.56	27.56	50.00	28	17
60x120 CM	2	1.44	15.50	29.00	64x12, 30x6	18
60x60 CM	4	1.44	15.50	26.50	40	25
30x30 CM	8	0.72	7.75	14.40	96	19
120x180 CM	2	4.32	46.50	87.00	27x9, 15x3	12
80x240 CM	1	1.92	20.67	69.00	26	12
600x120 CM	2	1.44	15.50	29.00	64x12, 30x6	18
60x60 CM	4	1.44	15.50	26.50	40	25

G/P

U/P

TECHNICAL SPECIFICATIONS - CERAMIC TILES / GROUP B1a

CHARACTERISTIC	TEST METHOD	INTERNATIONAL STD ISO 13006/EN 176 GROUP B1a	VAMIL VALUE
DIMENSION & SURFACE QUALITY			
Deviation In Length	ISO-10545-2	±0.6%	±0.2%
Deviation In Thickness	ISO-10545-2	±5%	±3%
Straightness of Sides	ISO-10545-2	±0.5%	±0.2%
Rectangularity	ISO-10545-2	±0.6%	±0.2%
Surface Flatness	ISO-10545-2	±0.5%	±0.2%
PHYSICAL & THERMAL PROPERTIES			
Water Absorption	ISO-10545-3	3% < E ≤ 6%	4 - 5%
Mohs Hardness	EN-101	Min.5	Min.5
Flexural Strength	ISO-10545-4	>20	>40N/mm ²
Skid Resistance (Friction Coefficient)	ISO-10545-17	>0.4	>0.4
Breaking Strength	ISO-10545-11	>1000	>1000
Frost Resistance	ISO-10545-12	Frost Proof	Frost Proof
Thermal Shock Resistance	ISO-10545-9	No Damage	No Damage
Moisture Expansion	ISO-10545-10	NIL	NIL
Resistance to Surface Abrasion	ISO-10545-7	Abrasion class shall be specified by the manufacturer	PEI III, IV & V
CHEMICAL PROPERTIES			
Chemical Resistance	ISO-10545-13	No Damage	No Damage
Color Resistance	ISO-10545-16	No Damage	No Damage
Stain Resistance	ISO-10545-14	Resistant	Resistant

PACKING DETAILS

Dimension (CM)	BOX					
	Pcs. per box	Sq. mtr	Sq. feet	Weight	Boxes / Pellet	Container
60x60 CM	4	1.44	15.50	26.50	40	25
20x60 CM	6	0.72	7.75	12.00	96	24
30x60 CM	5	0.90	9.69	13.00	96	21
30x45 CM	6	0.81	8.72	11.00	120	20
30x30 CM	9	0.81	8.72	11.00	120	20
10x20 CM	50	1.00	10.76	12.60	90	24
7.5x30 CM	44	0.99	10.66	13.20	81	24

